


Minibrute 2



SPECIFICATIONS

Identity No.	L0200MNB (Ferrule, 220V) L0201MNB (Ferrule, 110V) L0210MNB (Screw, 220V) L0211MNB (Screw, 110V)
Capacity	1,300W
Voltage	220 - 240V AC or 110 - 120V AC
Lamp Type	Par36 650W 120V FCX, FAY (Ferrule) Par36 650W 120V DWE, FBE (Screw)
Color Temp.	5000K / 3200K
Lamp Holder	Ferrule or Screw Terminal
Stirrup	Ø16mm (5/8 in.) Socket
Class	1
Max. Surface Temp.	200°C
Max. Ambient Temp.	45°C
Min. Distance to Illuminated Object	1.5 m
Min. Distance to Flammable Object	1.5 m
Operating Range	+45° - 0° - -45°
Weight (Lamphead)	3.3 kg

DIMENSIONS (mm)

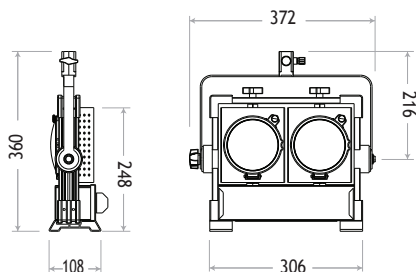

LAMPHEAD CONTENTS

Lamp Housing without Bulb (purple grey color)
Wire Guard
Stirrup with Ø16mm (5/8 in.) Socket
Requires Lamp Bulb

ACCESSORIES

2-leaf Barndoor
Safety Wire (for barndoor)
Filter Frame