



Cinelite 2000W

SPECIFICATIONS

Identity No.	L02000TO
Capacity	2,000W
Voltage	240V or 120V
Lamp Type	P2/27 2000W 230V or FEY 2000W 120V
Color Temp.	3200K
Lamp Holder	RX7s
Stirrup	Ø16mm (5/8 in.) Socket
Class	1
Max. Surface Temp.	220 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	2m
Min. Distance to Flammable Object	1m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	3.5kg

Cinelite 2000W

LAMPHEAD CONTENTS

- Lamp Housing without Bulb # (purple grey)
- 4-leaf Rotatable Barndoor with Safety Wire
- Wire Guard
- In-Line Switch
- Inlet Cable 3m (10 ft.)
- Stirrup with Ø16mm (5/8 in.) Socket

Requires Lamp Bulb

ACCESSORIES

4-leaf Rotatable Barndoor


Set of 4 Scrims Ø254mm (10 in.) :

Full Single, Full Double, Half Single, Half Double


Scrim Bag

Safety Wire (for barndoor)

DIMENSIONS (mm)

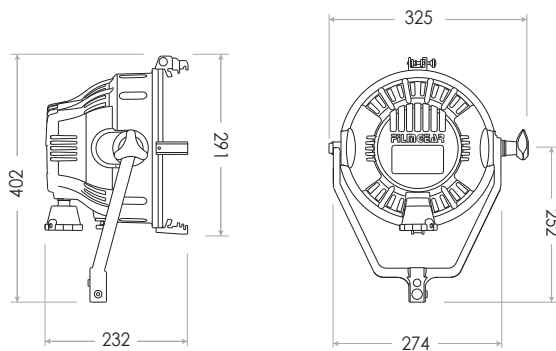

PHOTOMETRIC DATA

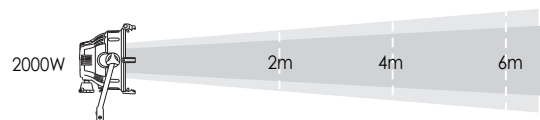

Spot (24°)			
Lux	33080	8270	3676
Beam Ø	0.85 m	1.70 m	2.55 m
Flood (79°)			
Lux	6310	1578	701
Beam Ø	3.30 m	6.59 m	9.89 m