




Softlight 5000W M.O.

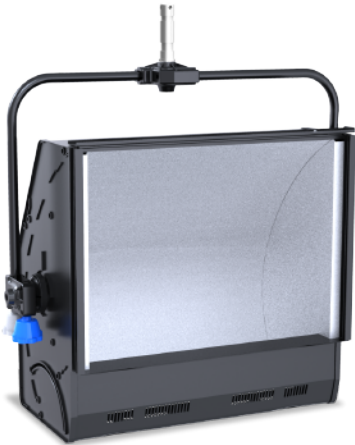


Softlight 5000W P.O.

Softlight 5000W


SPECIFICATIONS

Identity No.	L05000SO (M.O. / 220V) L15000SO (M.O. / 110V) L0500PSO (P.O. / 220V) L1500PSO (P.O. / 110V)
Capacity	1,250W / 1,000 x 4
Voltage	220 - 240V AC or 100 - 120V AC
Lamp Type	P2/12 1250W 230V (189mm) P2/7 1000W 230V (189mm) FFT 1000W 120V (167mm)
Color Temp.	3200K
Lamp Holder	R7s
M.O. / P.O. Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 20
Operating Range	+45° - 0° - -45°
Weight (Lamphead)	17.0 kg (M.O.) 18.5 kg (P.O.)

PHOTOMETRIC DATA

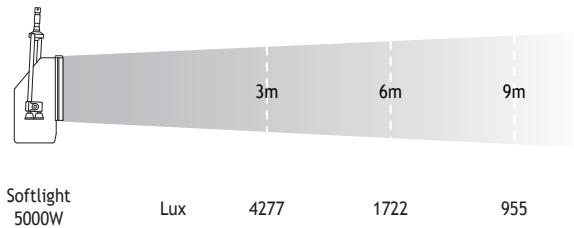

DIMENSIONS (mm)

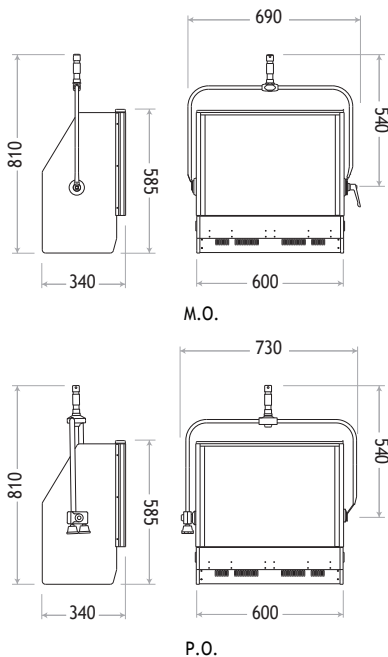

LAMPHEAD CONTENTS

- Lamp Housing without Bulb (black color)
- Wire Guard
- M.O. / P.O. Stirrup with Ø28mm (1-1/8 in.) Spigot
- On/Off switch
- Inlet Cable 4m (13 ft.)
- # Requires Lamp Bulb

ACCESSORIES

- Eggcrate
- Filter Frame
- Safety Cable (for lamphead)
- Pole Operated Stirrup (for P.O.)

* (M.O.) = Manual Operated
 (P.O.) = Pole Operated