



Sofflight 2000W Junior M.O.



Sofflight 2000W Junior P.O.

Sofflight 2000W Junior

SPECIFICATIONS

Identity No.	L02000SJ (M.O.) L0200PSJ (P.O.)
Capacity	1,000W / 800W x 2
Voltage	100 - 250V AC
Lamp Type	P2/20 1000W 230V (117mm) FCM 1000W 120V (117mm) P2/11 800W 230V (117mm)
Color Temp.	3200K
Lamp Holder	R7s
M.O. / P.O. Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 20
Operating Range	+45° - 0° - -45°
Weight (Lamphead)	3.9 kg (M.O.) 4.6 kg (P.O.)


LAMPHEAD CONTENTS

Lamp Housing without Bulb (black color)
Wire Guard
M.O. / P.O. Stirrup with Ø28mm (1-1/8 in.) Spigot
On/Off switch
Inlet Cable 4m (13 ft.)
Requires Lamp Bulb


ACCESSORIES

Eggcrate
Filter Frame
Safety Cable (for lamphead)
Pole Operated Stirrup (for P.O.)

DIMENSIONS (mm)

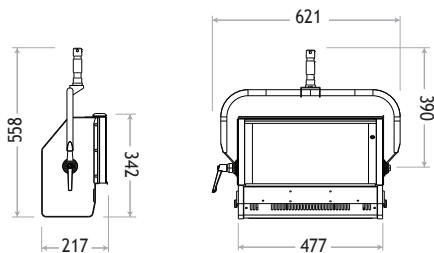

M.O.

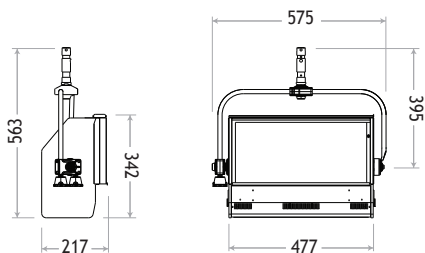

P.O.

* (M.O.) = Manual Operated
(P.O.) = Pole Operated