



Daylight Fresnel 9kW/6kW SE

LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø450mm (17-3/4 in.) Fresnel Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Fresnel 9kW/6kW SE



SPECIFICATIONS

Identify No.	L09060DS
Capacity	9,000W / 6,000W
Lamp Bulb Voltage	160V / 123V
Fresnel Lens	Ø450mm (17-3/4 in.)
Lamp Type	CSR 9000/SE/HR or HMI 9000W/SE MSR 6000/HR or HMI 6000W/SE
Color Temp.	5600K
Lamp Holder	GX38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	220 °C / 200 °C
Min. Distance to Illuminated Object	15m / 12m
Min. Distance to Flammable Object	1.5m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	38.7kg
Weight (with barndoor)	43.7kg

ACCESSORIES

- Electronic Ballast V3 : 9kW/6kW
- Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Filter Frame
- Set of 4 Scrims Ø533mm (21 in.) :
Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)

PHOTOMETRIC DATA

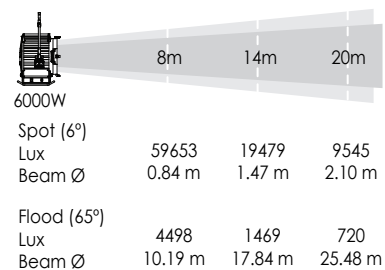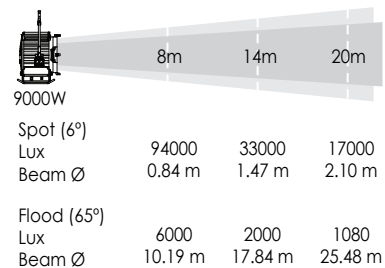

DIMENSIONS (mm)

