

**Daylight Par
Faceted
F18k
FACETED**



LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø645mm UV Protective Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot


Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Par Faceted F18k

SPECIFICATIONS

Identity No.	L1800FPS
Capacity	18,000W
Lamp Bulb Voltage	225V
UV Protective Lens	Ø645mm
Lamp Type	HMI 18000W/SE
Color Temp.	5600K
Lamp Holder	GX51
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	260 °C
Min. Distance to Illuminated Object	15m
Min. Distance to Flammable Object	2m
Operating Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	66kg
Weight (with barndoor)	72kg

PHOTOMETRIC DATA

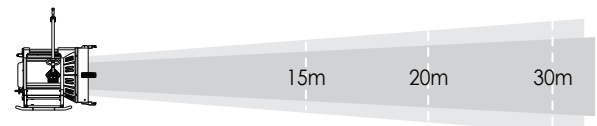

18kW				
Spot	Lux	50618	32490	14440
15°	Beam Ø	3.9 m	5.3 m	7.9 m
Flood	Lux	9476	3365	1495
50°	Beam Ø	14.0 m	18.7 m	28.0 m

ACCESSORIES

- Electronic Ballast V3 : 18kW/12kW
- Lamphead to Ballast Cable : 15m (49 ft.) or 20m (66 ft.)
- 4-leaf Rotatable Barndoor
- Set of 4 Scrimms Ø737mm :
 - Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)
- Spill Ring

DIMENSIONS (mm)

