

**Daylight Par
Faceted
F4K
FACETED**



LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø335mm UV Protective Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot


Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Par Faceted F4k

SPECIFICATIONS

| | |
|-------------------------------------|--------------------------|
| Identity No. | L0400FPS |
| Capacity | 4,000W |
| Lamp Bulb Voltage | 200V |
| UV Protective Lens | Ø335 mm |
| Lamp Type | HMI 4000W/SE |
| Color Temp. | 5600K |
| Lamp Holder | G38 |
| Stirrup | Ø28mm (1-1/8 in.) Spigot |
| Class / IP Rating | 1 / IP 23 |
| Max. Surface Temp. | 190 °C |
| Min. Distance to Illuminated Object | 10m |
| Min. Distance to Flammable Object | 1m |
| Operating Range | +45° ~ 0° ~ -45° |
| Weight (Lamphead) | 19kg |
| Weight (with barndoor) | 22kg |

PHOTOMETRIC DATA

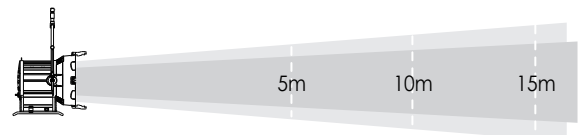

| | | | | | |
|-------|--------|--------|--------|--------|--|
| 4kW | | | | | |
| Spot | Lux | 80333 | 20083 | 8926 | |
| 15.4° | Beam Ø | 1.35 m | 2.7 m | 4.06 m | |
| Flood | | | | | |
| 63.6° | Lux | 11633 | 2908 | 1293 | |
| | Beam Ø | 6.2 m | 12.4 m | 18.6 m | |

ACCESSORIES

- Electronic Ballast V3 : 4kW/2.5kW
- Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Set of 4 Scrims Ø394mm :
 - Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)
- Spill Ring

DIMENSIONS (mm)

