

**Daylight Par
Faceted
F800
FACETED**



LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø208mm UV Protective Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot


Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Par Faceted F800

SPECIFICATIONS

Identity No.	L0080FPS
Capacity	800W
Lamp Bulb Voltage	95V
UV Protective Lens	Ø208mm
Lamp Type	CSR 800W SE/HR
Color Temp.	5600K
Lamp Holder	G22
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	150 °C
Min. Distance to Illuminated Object	3.5m
Min. Distance to Flammable Object	0.5m
Operating Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	6.7kg
Weight (with barndoor)	8kg

PHOTOMETRIC DATA

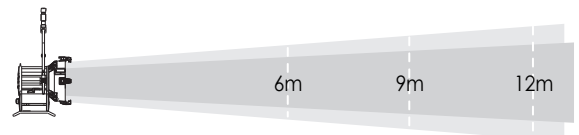

800W				
Spot	Lux	9369	4284	2476
15.8°	Beam Ø	1.66 m	2.49 m	3.32 m
Flood	Lux	856	390	215
84.8°	Beam Ø	10.96 m	16.44 m	21.92 m

ACCESSORIES

- Electronic Ballast V3 : 800W/575W
- Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Set of 4 Scrimms Ø254mm :
 - Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)
- Spill Ring

DIMENSIONS (mm)

