



Image 300c

(25°-50°)

LAMPHEAD CONTENTS

- Lamp Housing
- Barrel
- Stirrup with Ø28mm Spigot
- Set of 4 Cutters
- AC Cable

PHOTOMETRIC DATA

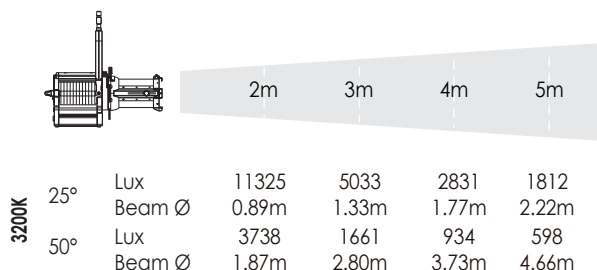
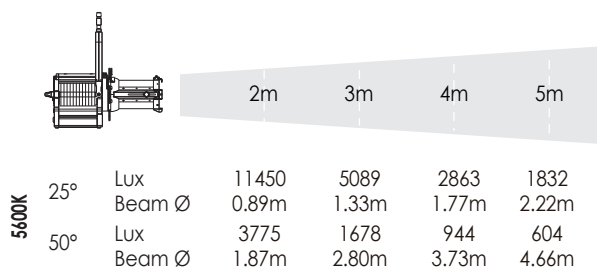


IMAGE 300C (25°-50°)

SPECIFICATIONS

Identity No.	L302550PZC (25°-50°)
Max. Capacity	300W
Voltage	100 - 240V AC / 22-36V DC
Current	1.4A@ 220V AC / 12.5A@ 24V DC
Color Temp. Range	2700K ~ 10000K
Color	R/G/B/W color mixing
CRI	Average >95
TLCI	Average >90
Beam Angle	25°-50°
Dimming Range	0-100%
Control Signal	DMX / RDM
Communication	DMX XLR-5, CRMX (LumenRadio), Bluetooth, Ethernet, USB A
DMX Channel	Varied (depends on DMX mode selection)
LED Lifetime	30,000 Hrs (Estimated)
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60°C
Max. Ambient Temp.	45°C
Operation Range	+45° ~ 0° ~ -45°
Weight (with Barrel)	15.5kg
Weight (Lamphead)	12kg

ACCESSORIES

- Hook Clamp
- Iris
- Gobo Adapter
- Safety Cable (for lamphead)
- Bluetooth Remote Control

DIMENSIONS (mm)

